



Dan Water Injection Riser Study

March 2015


Mærskolie og Gas AS required a 4" water injection line to be installed between Dan FA and Dan E. This necessitated the installation of an additional riser at both platforms.

A combined LICENGINEERING A/S and Baxter Hansen team was awarded the contract to examine various concepts for the risers and recommend the most economic method.

LICENGINEERING A/S / Baxter Hansen subsequently won the detail design contract for the complete riser / pipeline system.

The scope of work comprised analysis conceptual design and installation studies on:

- A tensioned riser, unsupported between the deck and seabed.
- Use of existing spare conductor slots.
- Riser supported by steel clamps welded to the platform structure.
- Riser supported at the top of the jacket leg and attached at intermediate positions by kevlar straps.

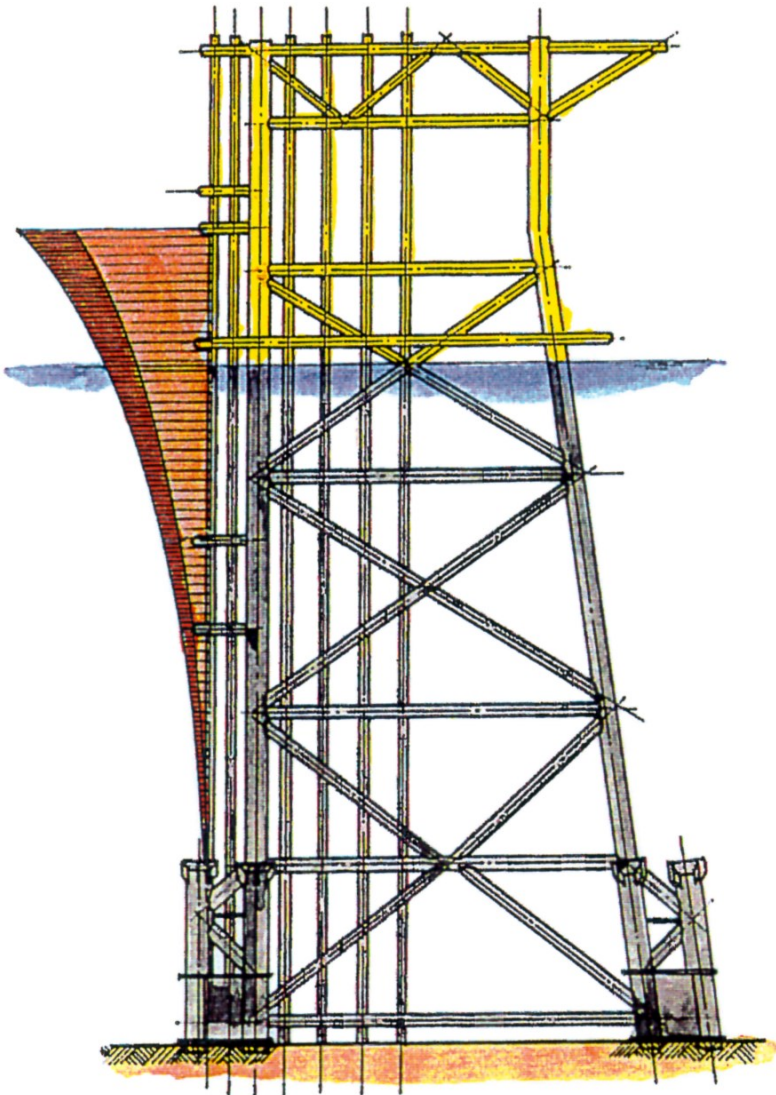

LICENGINEERING A/S

EHLERSVEJ 24
 DK-2900 HELLERUP, DENMARK
 PHONE: + 45 3962-1642
 FAX: + 45 3962-5480
 E-MAIL: mail@liceng.dk
 WWW: <http://www.liceng.dk>